

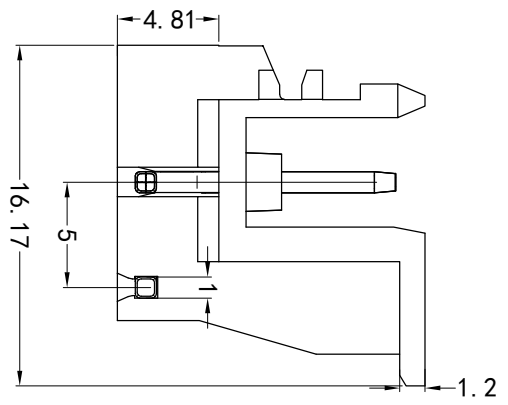
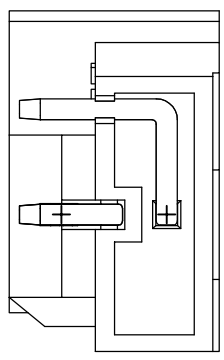
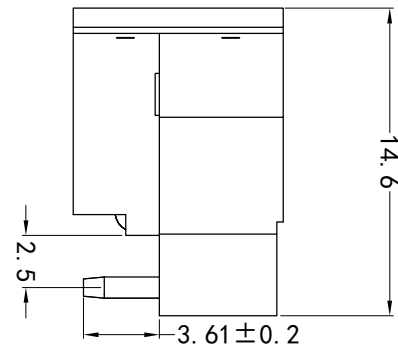
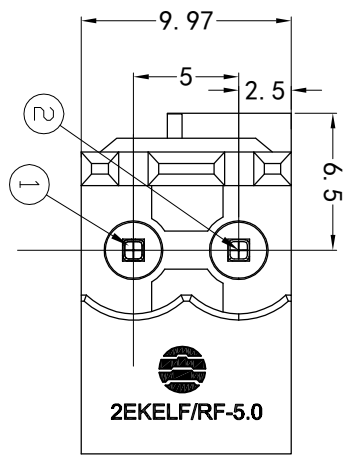


REV	CONTENT	CHK	DATE
V0.0	CONTENT	MYZ	22.10.12

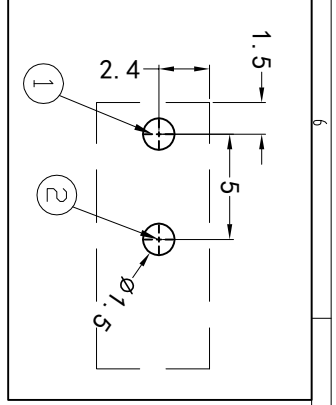

Total Pitch Tolerances		Nominal dimension range	
In mm		In mm	
0	over	0	over
30	to	30	to
53	to	53	to
70	to	70	to
90	to	90	to
115	to	115	to
150	to	150	to
250	to	250	to
350	to	350	to
500	to	500	to
30	to	30	to
53	to	53	to
70	to	70	to
90	to	90	to
115	to	115	to
150	to	150	to
200	to	200	to
250	to	250	to
320	to	320	to
0	to	0	to
10	to	10	to
10	to	10	to
all	to	all	to
0	to	0	to
100	to	100	to
150	to	150	to

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/10	/	300/10
IEC 标准/IEC Standard:	III/3	III/2	II/2
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	250/10	320/10	400/10
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	4	4
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

ITEM	NAME OF PART	Q'TY	MATERIAL
DWG.	MYZ	DATE	22.10.12
CHK.	DATE	SCALE	1:1
APP.	DATE	NAME	2EKELF-5.0-02P
Sanan Electrical Technology Co. Ltd		DWGNO.	XXXXX

