
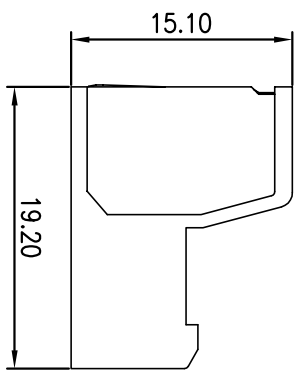
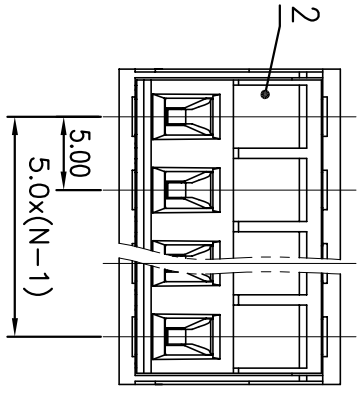
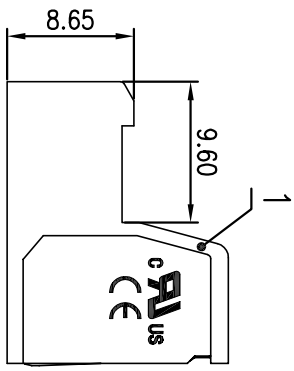


0	~3	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~>500	±2
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50														

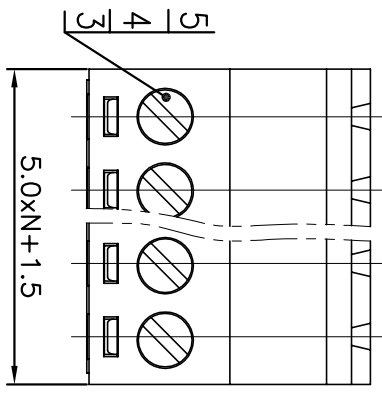

0	~3	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~>500	±2
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50														

MATERIAL:	SURFACE:	
MAT NO.:		
STATUS:		
APPD:		
CHKD:	NAME: <b>宁波三安电子科技有限公司</b> Sanan Electrical Technology Co. Ltd	
DRAFT:	DRAWING NO.: <b>ZESAKR-5.0-XXP-1Y-00A(H)</b>	
SIZE: A4	SCALE:	TYPE: REV
mm inch		SHEET 1/1

5	Screws	Steel	M3/Zn Plated	
4	cage	Copper alloy	Ni Plated	
3	Pin	Copper	Sn Plated	
2	Cover	PA66	UL94V-0	
1	Housing	PA66	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准 / UL Standard:		B	C	D
额定电压/电流 / Rated Voltage(V)/Current(A)		300/15		300/10
IEC 标准 / IEC Standard:				
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree		III/3	III/2	II/2
额定电压/电流 / Rated Voltage(V)/Current(A)		/	320/20	/
额定脉冲电压 / Rated Impulse Voltage(KV)			4	
额定扭矩 / Torque Tightening(N·m/Lb·in)		M3, 0.8/7.02		
导线范围 (硬线和软线) / Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)		2.5/28~12		
间距 / Pitch(mm)		5.0/N=02~22P		
剥线长度 / Stripping length(mm)		7-8		
使用温度范围 / Operating temperature(°C)		-40~+105		
符合RoHS环保要求 / Conform to RoHS		Yes		