
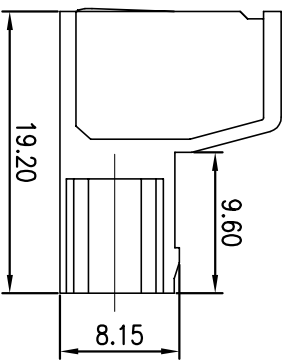
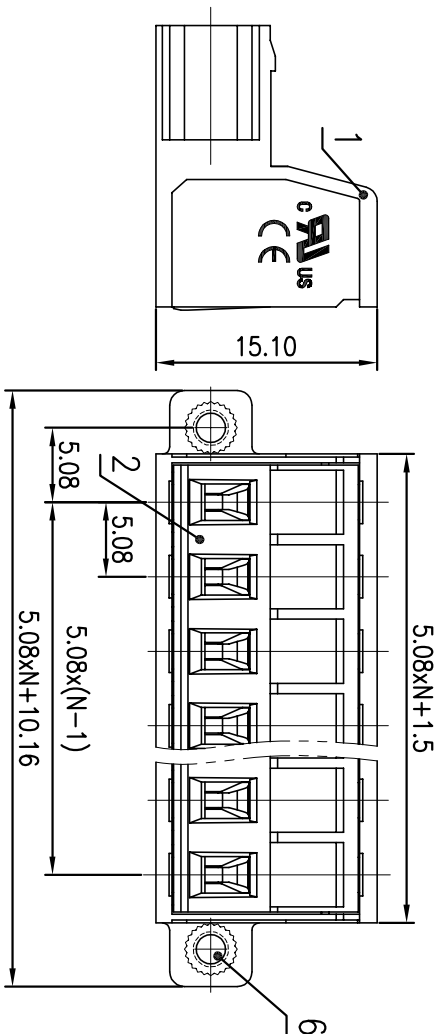


0	~>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10														
3	~	6	~	10	~	18	~	30	~	50	~	80	~	120	~	180	~	250	~	315	~	400	~	500	~	>500	±Z
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50																											

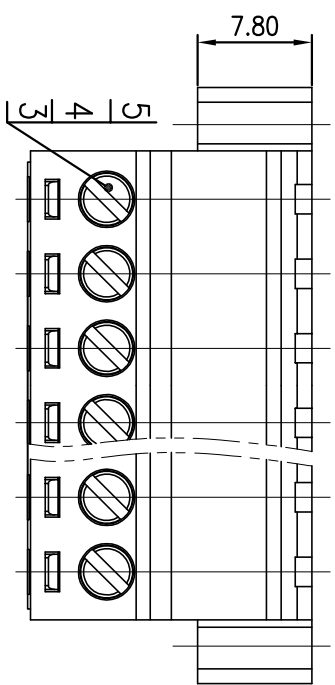

6	Nut	Copper alloy	M2.5/Zn Plated
5	Screws	Steel	M2.5/Zn Plated
4	cage	Copper alloy	Ni Plated
3	Pin	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准 / UL Standard:	B	C	D
额定电压/电流 / Rated Voltage(V)/Current(A)	300/15	300/10	
IEC 标准 / IEC Standard:			
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III/3	III/2	II/2
额定电压/电流 / Rated Voltage(V)/Current(A)	/	320/20	/
额定脉冲电压 (KV) / Rate Impulse Voltage(KV)			4
额定扭矩 / Torque Tightening(N·m/Lb·in)	M2.5: 0.4/3.54		
线径范围 (硬线和软线) / Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.2~2.5/28~12		
间距 / Pitch(mm) / 线数范围 / Poles	5.08 / N=02~22P		
剥线长度 / Stripping length(mm)	7~8		
使用温度范围 / Operating temperature(°C)	-40~+105		
符合 RoHS 环保要求 / Conform to RoHS	Yes		

MATERIAL: SURFACE:


**宁波三安电子科技有限公司**  
 Sanan Electrical Technology Co. Ltd

NAME: ZESAKRP-5.08-XXP-1Y-00A(H)  
 DRAWING NO.:

MAT NO.:	
STATUS:	
APPD.:	
CHKD.:	
DRAFT.:	
SIZE: A4	SCALE: 1/1
TYPE: SHEET	REV: 1/1

公差/General tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
	3	6	10	18	30	50	80	120	180	250	315	400	500	
	±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50													

1 2 3 4 5 6