
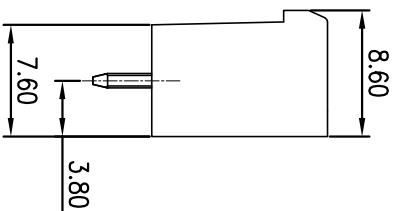
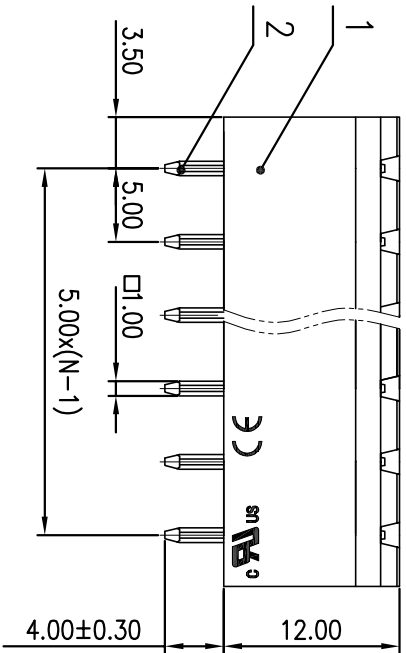
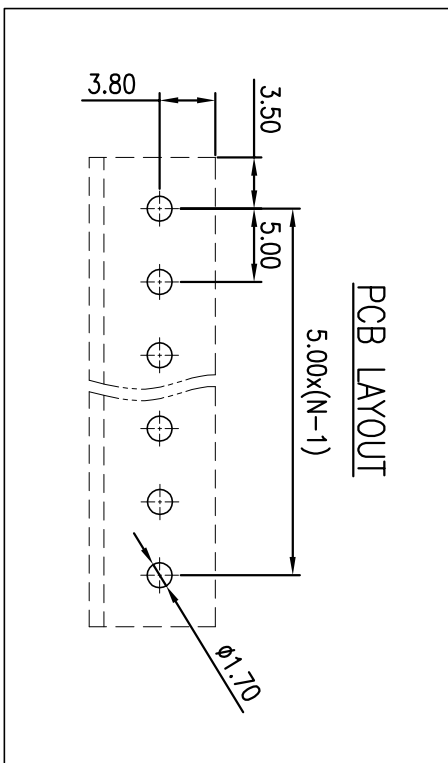


2 3 4 5 6

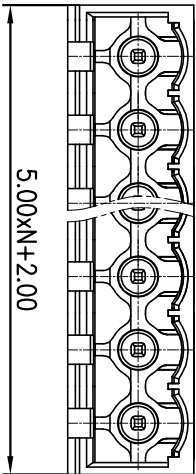

2	Pin	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 /UL Standard:		B	C
额定电压/电涌/Rated Voltage(V)/Current(A)		300/15	300/10
EC 标准 /IEC Standard:			III/2
过压类别 /Overvoltage Category/污染等级 / Pollution Degree			
额定电压/电涌/Rated Voltage(V)/Current(A)			320/20
额定脉冲电压(KV)/Rate Impulse Voltage(KV)			4
间距/Pitch(mm)/线距范围/ Poles			5.0/N=02P~24P
使用温度范围 /Operating temperature(°C)			-40~+105
符合RoHS环保要求 /Conform to RoHS			Yes
标准颜色编号 /Standard color number:			/
PANTONE / RAL			

MATERIAL: SURFACE:

MAT NO.:

STATUS:


APPD:

CHKD:

DRAFT:

SIZE: A4

TYPE: SCALE: SHEET 1/1



宁波三安电子科技有限公司  
Sanan Electrical Technology Co., Ltd

NAME: ZESATVC-5.0-XXP-1Y-100A(H)

DRAWING NO.:

REV

1/1

公差/General tolerances(mm)	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
	3	6	10	18	30	50	80	120	180	250	315	400	500	
	±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

1 2 3 4 5 6