
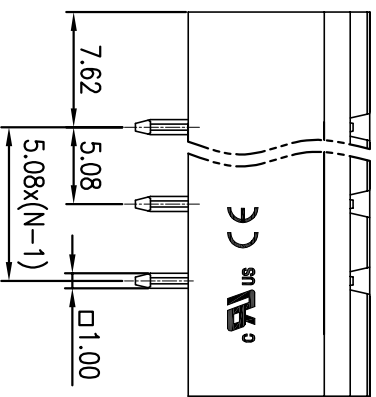


PCB LAYOUT

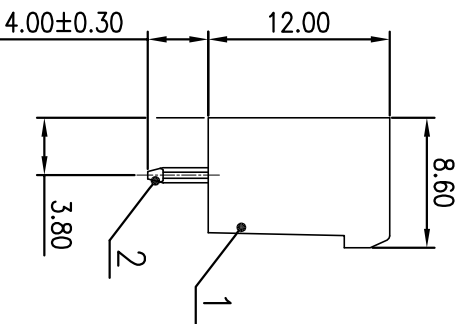

3	Nut	Copper alloy	/
2	Pin	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准	UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10	
EC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	II/2	II/2	
额定电压/电流/Rated Voltage(V)/Current(A)	/	320/20	/	
额定冲击电压(kV)/Rate Impulse Voltage(kV)	/	4	/	
线圈匝数/Coils		N=02~22P		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

SURFACE:



® 宁波三安电子科技有限公司  
Sanan Electrical Technology Co., Ltd

NAME: ZESAWM-5.08-XXP-1Y-100A(H)

MATERIAL:	
MAT NO.:	
STATUS:	
APPD:	
CHKD:	
DRT:	
DRAWING NO.:	
SCALE:	
REV	
SHEET	
1/1	

公差/General tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500
	±0.1/10	±0.15	±0.2	±0.25	±0.3	±0.37	±0.45	±0.5	±0.6	±0.75	±1.0	±1.2	±1.5	±2.0

±Z

SIZE: A4	mm	inch
TYPE:		
SCALE:		
SHEET		
1/1		